

## Installation Information

VX-4000 and VX-5500 Radios must be modified for "Low Speed Data" input, to allow for audio input from 300Hz to 3kHz, and to allow access to DC power for mic bias. This is done by removing or adding solder bridges as required.


VX-4000: Jumper JP2006 OPEN and JP2007 INSTALLED (TX audio) - Jumper JP2005 OPEN and JP 2009 INSTALLED (DC power)

VX-5500 and VX-6000: Jumper JP2005 OPEN and JP2006 INSTALLED (TX audio), Jumper JP2007 OPEN and JP 2008 INSTALLED (DC power)

Radios must be programmed for "External PTT" on pin 11.


NOTE: This is a low-volume production radio cable. Only limited technical support is available from Setcom. If the interface does not work correctly, please return it for a refund within 30 days of purchase. please see Setcom's return policy at: [Please test radio cable with radio BEFORE installing System 900.](http://www.SetcomCorp.com>Returns</a></p>
</div>
<div data-bbox=)

## **RC-xxY15 Cable**

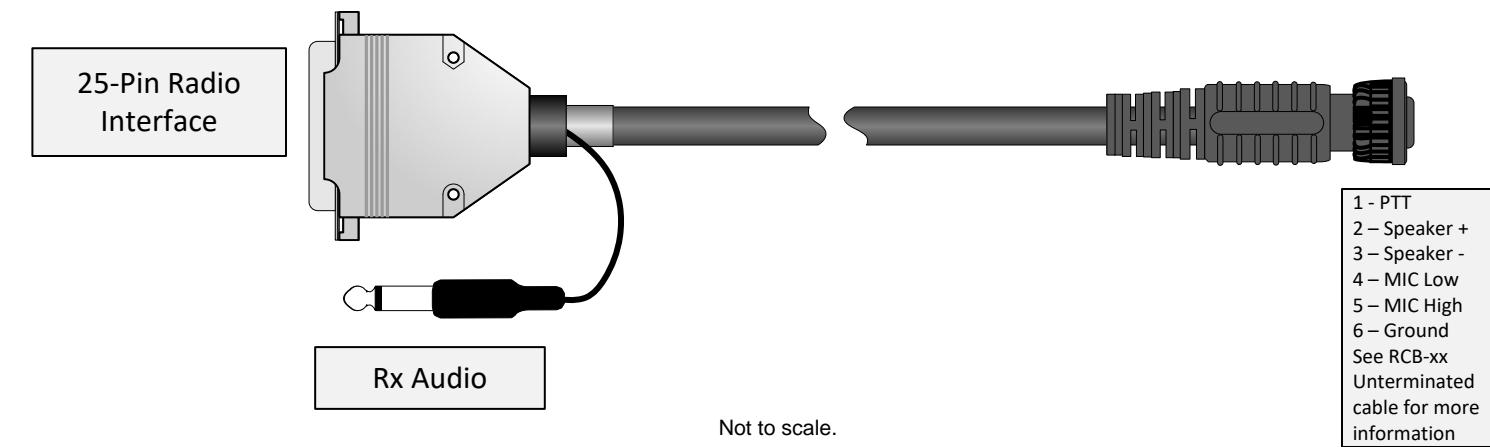

### Rear View

VX-4600I

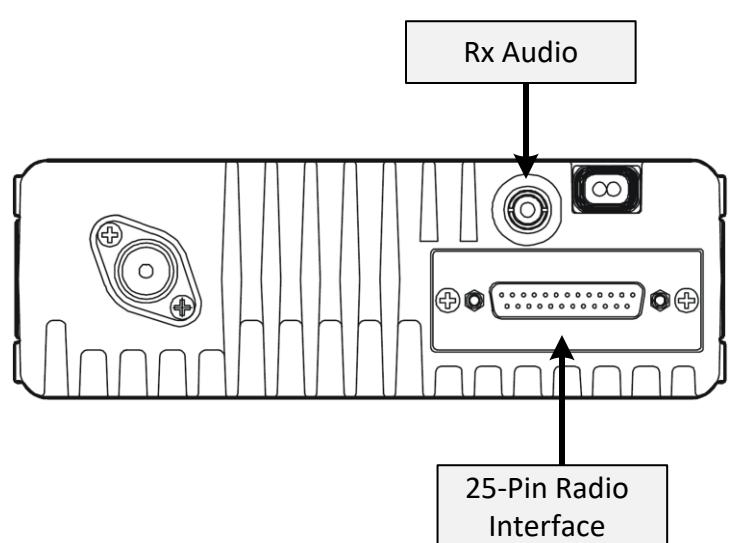

### 25-Pin Connector

Front View

