

Installation Information

Radio Interface for 25-Pin and 9-pin Accessory Port Connectors on the RF Deck

VHF, UHF P25 Compliant Accessory connector is DB25 pin out per Kenwood spec.
KMC-27(x) hand mic is controlled via radio program setup.


9-pin Access. Connector:

SPKR+ = pin 6 Orange wire (jumper also to pin 3 for internal speaker enable)


SPKR- = pin 2 White wire

If internal speaker is not used, cut Orange jumper from pin 6 to pin 3 and insulate with heat-shrink tubing
Pin 24 (AUX I/O 1) is programmed as external PTT input.


RCB-xxKU Cable

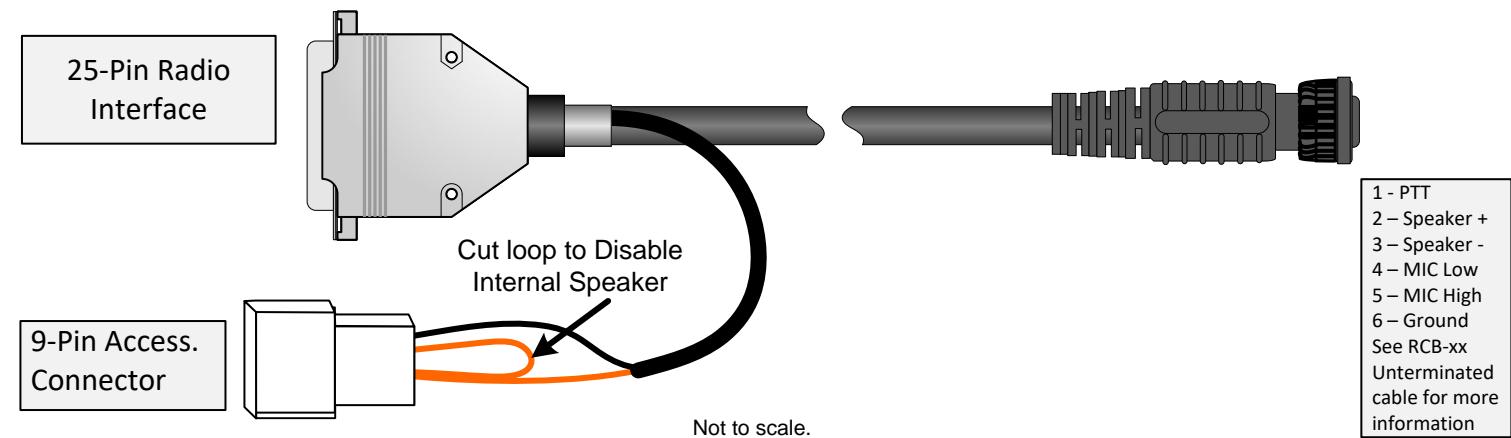

Rear View TK-5710H radio

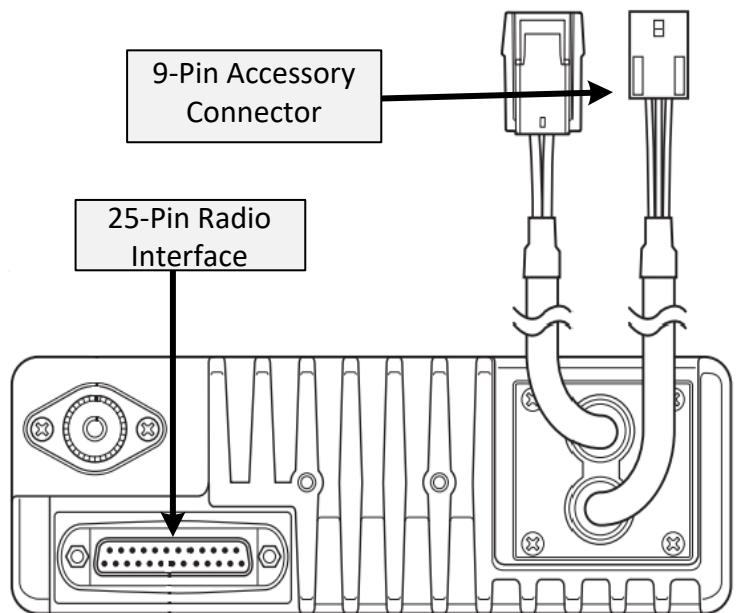

25-Pin Radio Interface Rear View

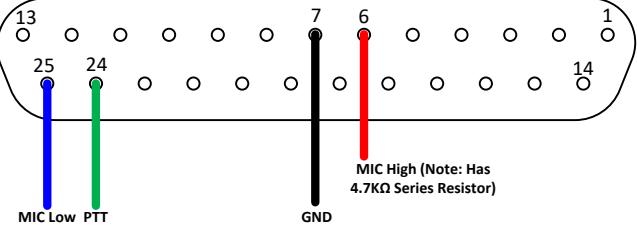

9-Pin Accessory Connector Rear View

