

## Installation Information

Radio Interface for 20-Pin Accessory Port Connectors on the RF Deck

16- Pin radio Interface connector must be centered on 20-Pin Accessory connector port.  
The outer two pins on either side are not used.


External Speaker connections.

If an external speaker is not required, insulate external speaker wires with heat-shrink tubing.

White wire loop enables the internal speaker pin 15.

Cut and insulate with heat shrink or tape if internal speaker is not required.

## **RC-xxMW Cable**

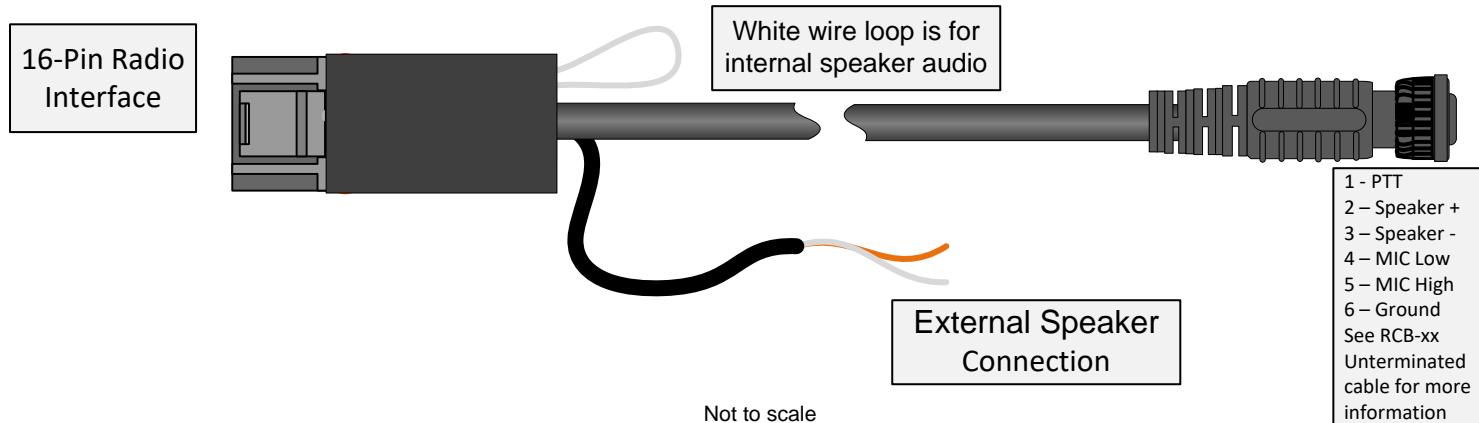

### Back View

CM200



### Front View

16-pin connector

